



# A-CSD Series Drives



A-CSD 02/04

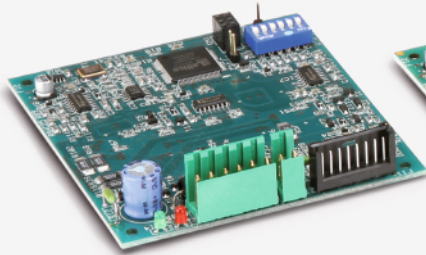

A-CSD 02.V/04.V

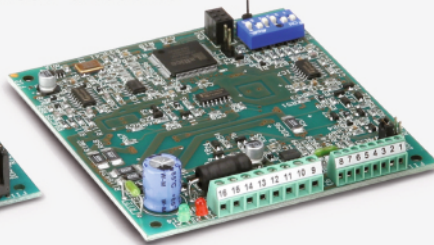

A-CSD 92/94



## INTRODUCTION

- New series of bipolar microstep stepping motor drives, specifically developed for applications sensitive to acoustic noise and vibration.
- Significant evolution of the CSD series, preserving backward mechanical, electrical and applicative compatibility.
- Target: advanced applications requiring high precision, smoothness of movement and low acoustic noise.
- UL recognized.

## HIGHLIGHTS

- Full digital microstepping drive.
- Adaptive microstepping up to a 3.200 step/rev.
- Intelligent management of the current profile that achieves good results in terms of smoothness of movement, low noise and vibration control.
- A highly sophisticated control system, preserving anyhow the traditional ease of use of R.T.A. drives.


Series	Model	V <sub>DC</sub> range (Volt)	I <sub>NP</sub> min. (Peak value) (Amp)	I <sub>NP</sub> max. (Peak value) (Amp)	Dimensions (mm)
A-CSD	02 - 02.V*	24 to 48	0.7	2.4	92x85x22
A-CSD	04 - 04.V*	24 to 48	2.6	4.4	92x85x23
A-CSD	92	24 to 48	0.7	2.4	99x90x21
A-CSD	94	24 to 48	2.6	4.4	99x90x21

\* A-CSD 02.V and A-CSD 04.V versions are equipped with screw-type connectors.

## TECHNICAL FEATURES

- Range of operating voltage: 24-48 V<sub>DC</sub>.
- Range of current: 0.7-4.4 Amp. Setting up to eight possible values by means of dip-switches.
- Microstepping: 400, 800, 1.600 and 3.200 steps/revolution. Setting by means of dip-switches.
- Automatic current reduction at motor standstill.
- Management of the current profile setting by means of a dip-switch.
- Protections:
  - Protection against under-voltage and over-voltage.
  - Protection against a short-circuit at motor outputs.
  - Overtemperature protection with thermal sensor.
- Electronic damping facility for further acoustic noise and mechanic vibrations reduction.
- Available versions: boxed/open frame, crimp-type/screw-type connectors. Maximum compactness.
- A kit for mounting on a DIN rail is available as optional. Code: KSM04 (Only for A-CSD 92/94 models)
- UL recognized.
- Warranty: 24 months.

## POWER AND LOGIC CONNECTIONS

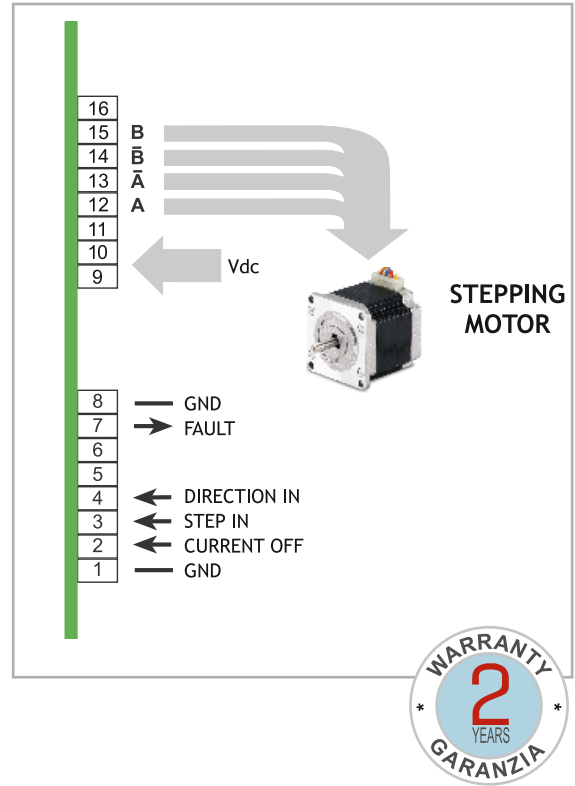


A-CSD is included in KIT CNC 02, a complete 48 VDC motion solution, designed for 3-axes CNC Router machines.




## MECHANICAL DIMENSIONS

A-CSD 02 / A-CSD 04

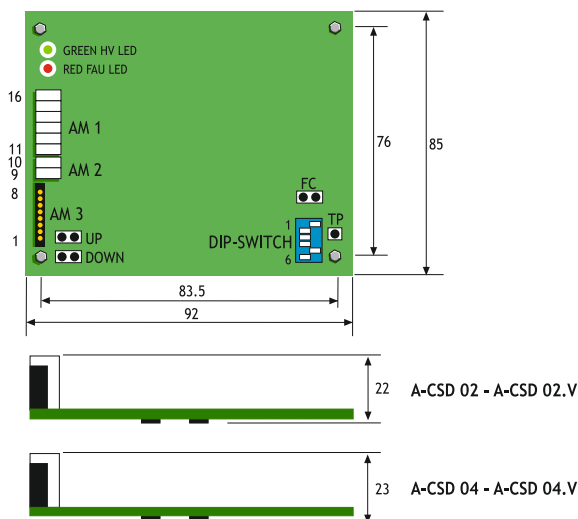

A-CSD 92 / A-CSD 94

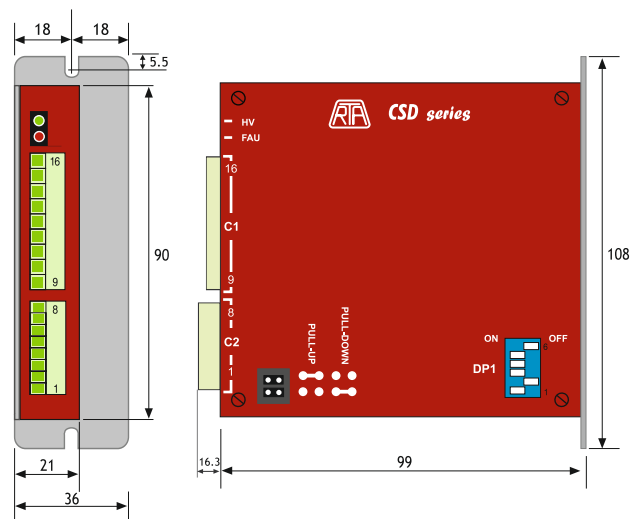

Dimensions in millimeters - Not in scale.



R.T.A. s.r.l.  
Via E. Mattei - Frazz. Divisa  
27020 Marcignago (PV) (Italy)  
T +39.0382.929.855  
F +39.0382.929.150  
www.rta.it

R.T.A. Deutschland GmbH  
Bublitzter Strasse 34, 40599  
Duesseldorf (Germany)  
T +49.211.749.668.60  
F +49.211.749.668.66  
www.rta-deutschland.de

R.T.A. IBERICA  
C/Generalitat 22, Local 1  
08850 Gava - Barcelona (Spain)  
T +34 936.388.805  
F +34 936.334.595  
www.rta-iberica.es

R.T.A. INDIA Pvt  
Teerth Business Center 3<sup>rd</sup> Floor, Unit No. 7,  
Block EL-15, MIDC Bhosari Pimpri-Chinchwad,  
Pune 411026 (India)  
Tel. +91 9422507445  
www.rta-india.in