


NDC Series Drives

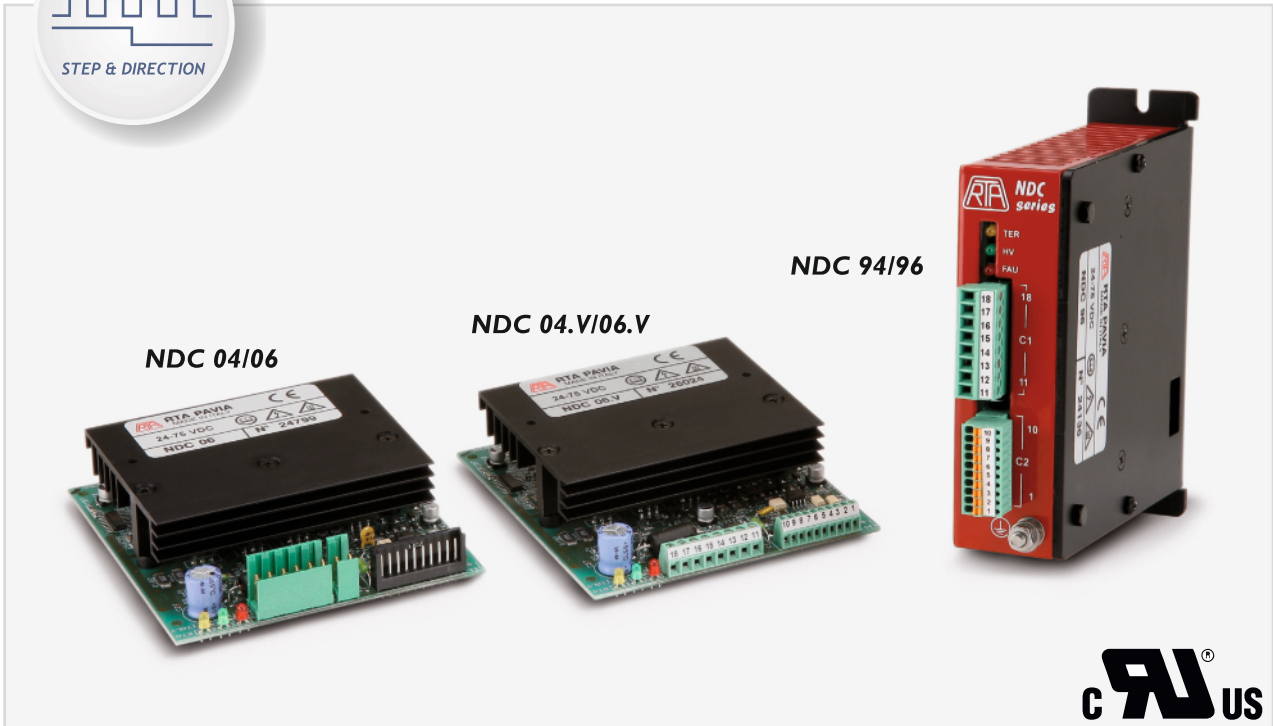

INTRODUCTION

- Series of ministepped bipolar chopper drives, suitable for driving medium power two-phase stepping motors, with four, six or eight terminals.
- Compact, easy to use and cost effective solution. This system is designed for easy mounting inside a metallic electrical cabinet.
- Target: medium and medium-low power applications without special configuration requirement, but needing great dynamic performance, high reliability, low acoustic noise and mechanic vibrations reduction.
- UL recognized.

HIGHLIGHTS

- Microstepping function up to 4.000 step/rev.
- Electronic damping facility for further acoustic noise and mechanic vibrations reduction at low and medium speed.
- Separated connectors for logic signals and power connections.
- Optoisolated and differential input and output signals ease interfacing with the most commonly used control systems.


Series	Model	V _{DC} range (Volt)	I _{NP} min. (Peak value) (Amp)	I _{NP} max. (Peak value) (Amp)	Dimensions (mm)
NDC	04 - 04.V*	24 to 75	0.6	2.0	101x94x25
NDC	06 - 06.V*	24 to 75	1.9	6.0	101x94x25
NDC	94	24 to 75	0.6	2.0	110x108x34
NDC	96	24 to 75	1.9	6.0	110x108x34

* NDC 04.V and NDC 06.V versions are equipped with screw-type connectors.


TECHNICAL FEATURES

- Range of operating voltages: 24-75 V_{DC}.
- Range of current: 0.6-6.0 Amp. Setting up to eight possible values by means of dip-switches.
- Microstepping: 400, 800, 1.600, 3.200 and 500, 1.000, 2.000, 4.000 steps /revolution. Setting by means of dip-switches.
- Automatic current reduction at motor standstill.
- Protections:
 - Protection against under-voltage and over-voltage.
 - Protection against a short-circuit at motor outputs.
 - Overtemperature protection with thermal sensor.
- Optoinsulated inputs compatible with differential control signals.
- Possibility to switch off motor current with an external logic signal.
- High efficiency CHOPPER with MOSFET final stage output.
- Electronic damping facility for further acoustic noise and mechanic vibrations reduction at low and medium speed.
- Available a version with built-in oscillator, with speed range from 14 to 450 rpm. Setting by means of dip switches
- Version: boxed/open frame, equipped with crimp-type or screw-type connectors. Maximum compactness.
- A kit for mounting on a DIN rail is available as optional. Code: KNDCGD (Only for NDC 94/96 models)
- UL recognized.
- Warranty: 24 months.

POWER AND LOGIC CONNECTIONS

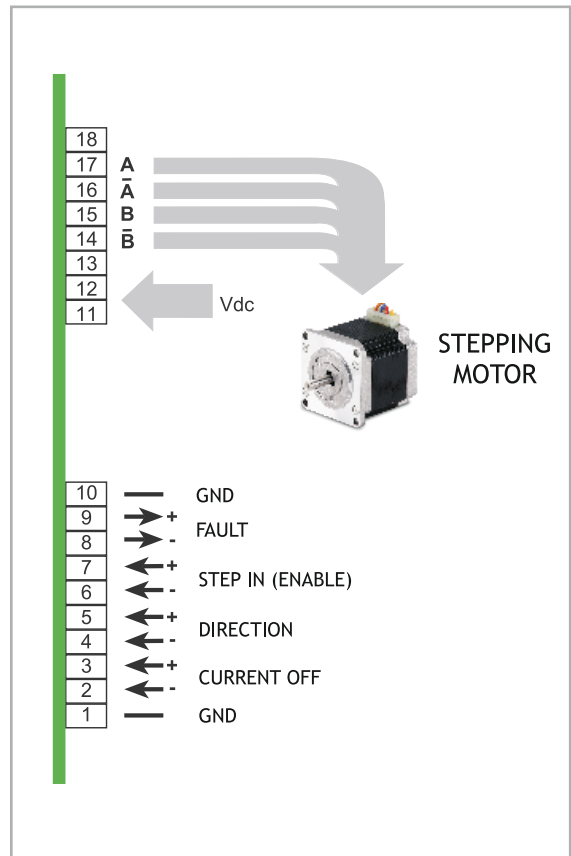

MECHANICAL DIMENSIONS

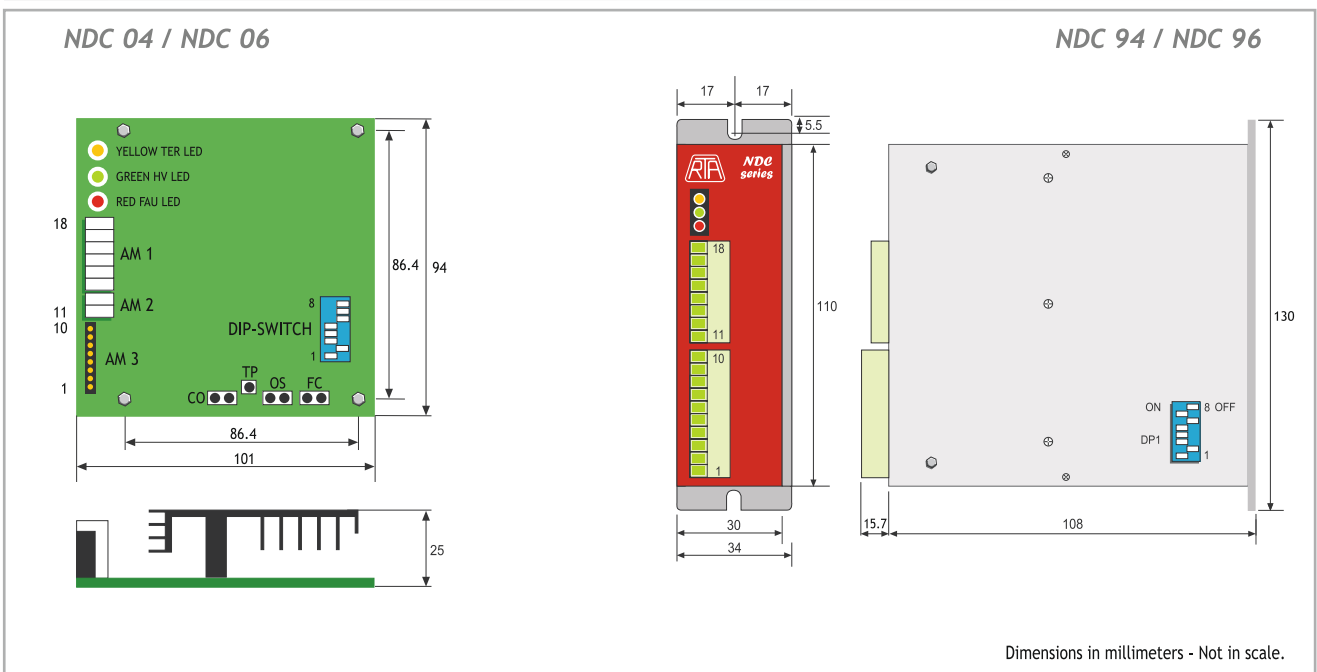

Dimensions in millimeters - Not in scale.



R.T.A. s.r.l.
Via E. Mattei - Fraz- Divisa
27020 Marcignago (PV) (Italy)
T +39.0382.929.855
F +39.0382.929.150
www.rta.it

R.T.A. Deutschland GmbH
Bublitzter Strasse 34, 40599
Duesseldorf (Germany)
T +49.211.749.668.60
F +49.211.749.668.66
www.rta-deutschland.de

R.T.A. IBERICA
C/Generalitat 22, Local 1
08850 Gava - Barcelona (Spain)
T +34 936.388.805
F +34 936.334.595
www.rta-iberica.es

R.T.A. INDIA Pvt
Teerth Business Center 3rd Floor, Unit No. 7,
Block EL-15, MIDC Bhosari Pimpri-Chinchwad,
Pune 411026 (India)
Tel. +91 9422507445
www.rta-india.in