

X-PLUS MS4 Series Drives

INTRODUCTION

- X-Plus MS4 is a new model of RTA flagship high-power stepping motor drive with STEP&DIR, Analog Input and Modbus RTU RS-485 interface.
- Embedded Auto-Sync and Auto-Feed functions with encoder, featuring a closed loop positioning and motor performance optimization.

AUTO-FEED

AUTO-FEED is a closed loop function with:

- Very simple tuning
- Lower power consumption and heating



MODBUS RTU MAIN FUNCTIONS

- Homing, Position and Velocity mode
- Registers for diagnostics



HIGHLIGHTS

- 3 Current Control modes available: Open Loop, Auto-Sync and Auto-Feed.
- Configuration settings, diagnostics and setup via RTA STUDIO for Windows®.
- INPUT and OUTPUT configurable.
- Extended interfaces: STEP&DIR, Analog Input velocity setpoint (± 10 Volt) and Modbus RTU.
- Integrated system for back EMF energy dissipation with optional external resistor.
- Zero index, Proximity Switch and Hard Stop searching function.
- Replied encoder signal output.



STO FUNCTION FEATURES

- Safe Torque Off (STO) function - **SIL3-Plc**
- Error Detection Monitor (EDM) output

SIL3
SAFE TORQUE
OFF (STO)


ONE OF THE MOST COMPACT DRIVES WITH POWER INPUT DIRECTLY FROM THE MAIN AC SUPPLY (110 - 230 VAC)

Series	Model	V _{AC} range (Volt)	I nom. (Amp)	I boost (Amp)	Dimensions (mm)
X-PLUS	MS4	110 to 230 +/- 15%	4.8	6.0	169x129x46


TECHNICAL FEATURES

- Range of operating nominal voltage: 110-230 V_{AC}.
- Up to 6.0 Amps motor current setting.
- RS-485 baud rate up to 256000.
- Microstepping: 400, 800, 1600, 3200, 6400 and 12800 steps/revolutions.
- Various encoder resolution available.
- Protections:
 - Protection against under-voltage and over-voltage
 - Protection against a short-circuit at motor outputs
 - Overtemperature protection with thermal sensor
 - Open motor/encoder phase.
- Automatic current reduction at motor standstill.
- Electronic damping facility for further acoustic noise and mechanic vibrations reduction.
- Easy wiring with plug-in connectors. Maximum compactness.
- Optoinsulated digital I/O to ensure best EM noise immunity.
- Coupling with stepping motors rated for high insulation is mandatory.
- Warranty: 24 months.

POWER AND LOGIC CONNECTIONS

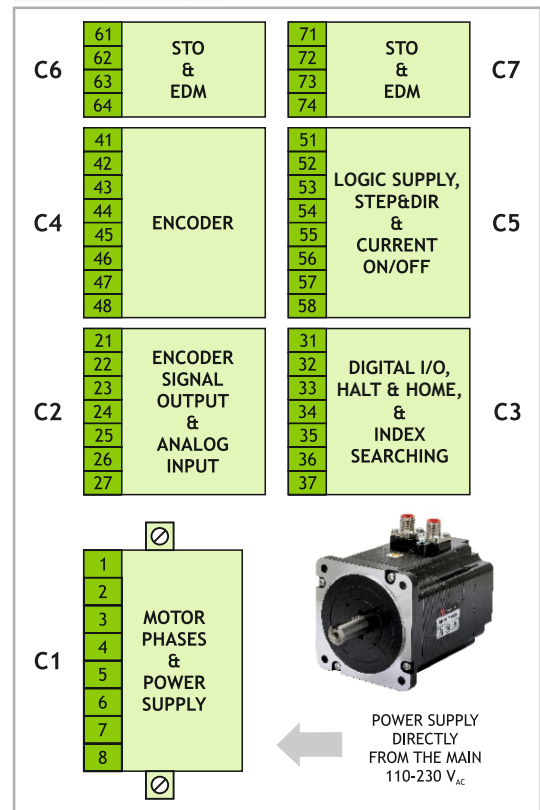

MECHANICAL DIMENSIONS

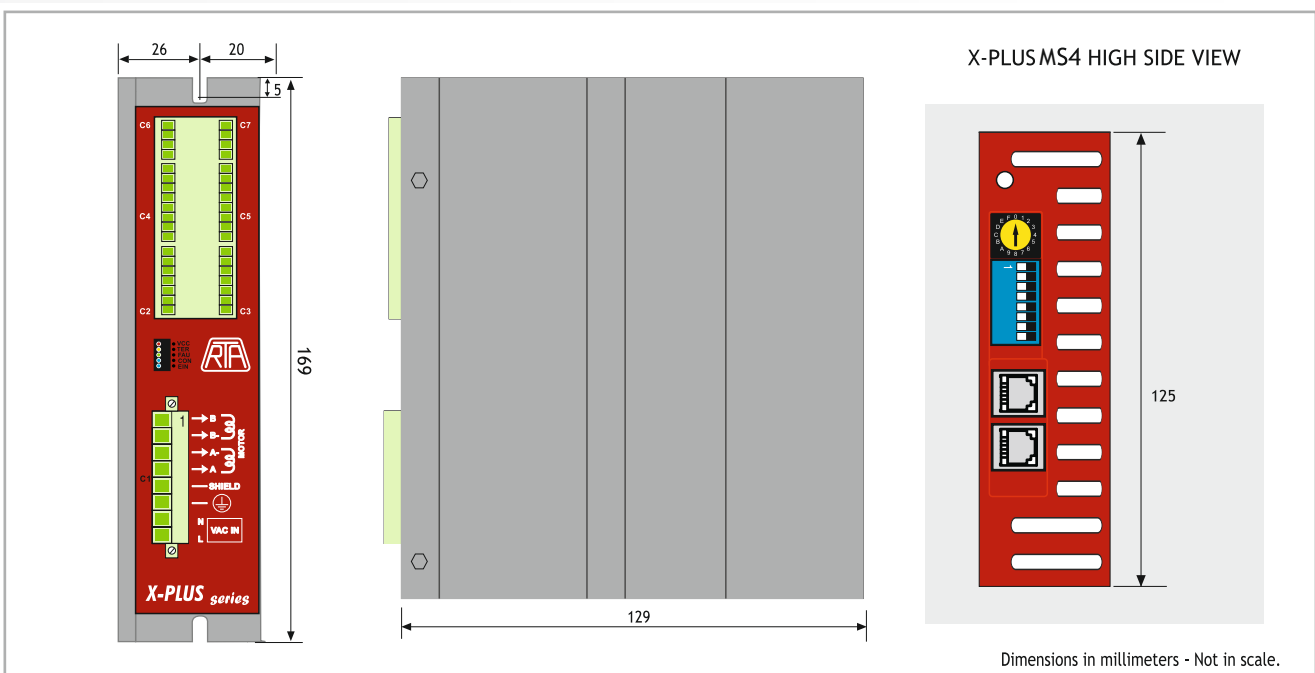

R.T.A. s.r.l.
Via E. Mattei - Fraz- Divisa
27020 Marcignago (PV) (Italy)
T +39.0382.929.855
F +39.0382.929.150
www.rta.it

R.T.A. Deutschland GmbH
Bublitzer Strasse 34, 40599
Duesseldorf (Germany)
T +49.211.749.668.60
F +49.211.749.668.66
www.rta-deutschland.de

R.T.A. IBERICA
C/Generalitat 22, Local 1
08850 Gava - Barcelona (Spain)
T +34 936.388.805
F +34 936.334.595
www.rta-iberica.es

R.T.A. INDIA Pvt
Teerth Business Center 3rd Floor, Unit No. 7,
Block EL-15, MIDC Bhosari Pimpri-Chinchwad,
Pune 411026 (India)
Tel. +91 9422507445
www.rta-india.in